

## Plug-in Signal Conditioners M-UNIT

### RTD TRANSMITTER


(CE, non-isolated)

#### Functions & Features

- Accepting direct input from an RTD and providing a standard process signal
- Linearization
- Burnout protection
- "Active bridge" circuit containing two constant current sources allows large leadwire resistances up to 200 Ω
- High density mounting

#### Typical Applications

- Long distance transmission between the RTD and the transmitter
- Combination with intrinsic safety barriers



### MODEL: RB-[1][2]-[3][4]

#### ORDERING INFORMATION

- Code number: RB-[1][2]-[3][4]
- Specify a code from below for each of [1] through [4].  
(e.g. RB-1A-B/BL/CE/Q)
- Temperature range (e.g. 0 - 500°C)
- Special output range (For codes Z & 0)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

#### [1] INPUT RTD (2- or 3-wire)

- 1:** JPt 100 (JIS'89)  
(Usable range: -200 to +500°C, -328 to +932°F; min.span: 50°C, 90°F)
- 3:** Pt 100 (JIS'89)  
(Usable range: -200 to +650°C, -328 to +1202°F; min.span: 50°C, 90°F)
- 4:** Pt 100 (JIS'97, IEC)  
(Usable range: -200 to +650°C, -328 to +1202°F; min.span: 50°C, 90°F)
- 5:** Pt 50 Ω (JIS'81)  
(Usable range: -200 to +500°C, -328 to +932°F; min.span: 100°C, 180°F)
- 6:** Ni 508.4 Ω  
(Usable range: -50 to +200°C, -58 to +392°F; min.span: 30°C, 54°F)

**0:** Specify

Note: Consult us for 2-wire RTD

#### [2] OUTPUT

Current

- A:** 4 - 20 mA DC (Load resistance 750 Ω max.)  
**B:** 2 - 10 mA DC (Load resistance 1500 Ω max.)  
**C:** 1 - 5 mA DC (Load resistance 3000 Ω max.)  
**D:** 0 - 20 mA DC (Load resistance 750 Ω max.)  
**E:** 0 - 16 mA DC (Load resistance 900 Ω max.)  
**F:** 0 - 10 mA DC (Load resistance 1500 Ω max.)  
**G:** 0 - 1 mA DC (Load resistance 15 kΩ max.)  
**Z:** Specify current (See OUTPUT SPECIFICATIONS)

Voltage

- 1:** 0 - 10 mV DC (Load resistance 10 kΩ min.)  
**2:** 0 - 100 mV DC (Load resistance 100 kΩ min.)  
**3:** 0 - 1 V DC (Load resistance 3000 Ω min.)  
**4:** 0 - 10 V DC (Load resistance 10 kΩ min.)  
**5:** 0 - 5 V DC (Load resistance 5000 Ω min.)  
**6:** 1 - 5 V DC (Load resistance 5000 Ω min.)  
**0:** Specify voltage (See OUTPUT SPECIFICATIONS)

#### [3] POWER INPUT

AC Power

- B:** 100 V AC  
**C:** 110 V AC  
**D:** 115 V AC  
**F:** 120 V AC  
**G:** 200 V AC  
**H:** 220 V AC  
**J:** 240 V AC

DC Power

- S:** 12 V DC  
**R:** 24 V DC  
**V:** 48 V DC

#### [4] OPTIONS (multiple selections)

Burnout

**blank:** Upscale burnout

**/BL:** Downscale burnout

Standards & Approvals (must be specified)

**/CE:** CE marking

Other Options

**blank:** none

**/Q:** Option other than the above (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

**/C01:** Silicone coating

**/C02:** Polyurethane coating

/C03: Rubber coating  
TERMINAL SCREW MATERIAL  
/S01: Stainless steel

**Insulation resistance:**  $\geq 100 \text{ M}\Omega$  with 500 V DC  
**Dielectric strength:** 2300 V AC @1 minute  
(input or output to power to ground)

## GENERAL SPECIFICATIONS

**Construction:** Plug-in  
**Connection:** M3.5 screw terminals  
**Screw terminal:** Chromated steel (standard) or stainless steel  
**Housing material:** Flame-resistant resin (black)  
**Isolation:** Input or output to power  
**Overrange output:** Approx. -10 to +120 % at 1 - 5 V  
**Zero adjustment:** -5 to +5 % (front)  
**Span adjustment:** 95 to 105 % (front)  
**At burnout:** Downscale  $\leq -10 \%$ , Upscale  $\geq 110 \%$   
(When the offset is negative, downscale  $\leq -8 \%$ , upscale  $\geq 108 \%$ .)  
**Linearization:** Standard

## STANDARDS & APPROVALS

**EU conformity:**  
EMC Directive  
EMI EN 61000-6-4  
EMS EN 61000-6-2  
Low Voltage Directive  
EN 61010-1  
Installation Category II  
Pollution Degree 2  
Input or output to power: Reinforced insulation (300 V)  
RoHS Directive

## INPUT SPECIFICATIONS

**Maximum leadwire resistance:** 200  $\Omega$  per wire (3-wire)  
**Sensing current:** 2 mA

## OUTPUT SPECIFICATIONS

■ **DC Current:** 0 - 20 mA DC  
**Minimum span:** 1 mA  
**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 15 V max.  
■ **DC Voltage:** -10 - +12 V DC  
**Minimum span:** 5 mV  
**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 1 mA max. at  $\geq 3 \text{ V}$


## INSTALLATION

**Power input**  
• **AC:** Operational voltage range: rating  $\pm 10 \%$ ,  
50/60  $\pm 2$  Hz, approx. 2 VA  
• **DC:** Operational voltage range: rating  $\pm 10 \%$ ,  
ripple 10 %p-p max., approx. 2 W (80 mA at 24 V)  
**Operating temperature:** -5 to +60°C (23 to 140°F)  
**Operating humidity:** 30 to 90 %RH (non-condensing)  
**Mounting:** Surface or DIN rail  
**Weight:** 350 g (0.77 lb)

## PERFORMANCE in percentage of span


**Accuracy:**  $\pm 0.2 \%$   
**Temp. coefficient:**  $\pm 0.015 \%/^{\circ}\text{C}$  ( $\pm 0.008 \%/^{\circ}\text{F}$ )  
**Response time:**  $\leq 0.5$  sec. (0 - 90 %)  
**Burnout response:**  $\leq 10$  sec.  
**Line voltage effect:**  $\pm 0.1 \%$  over voltage range

## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

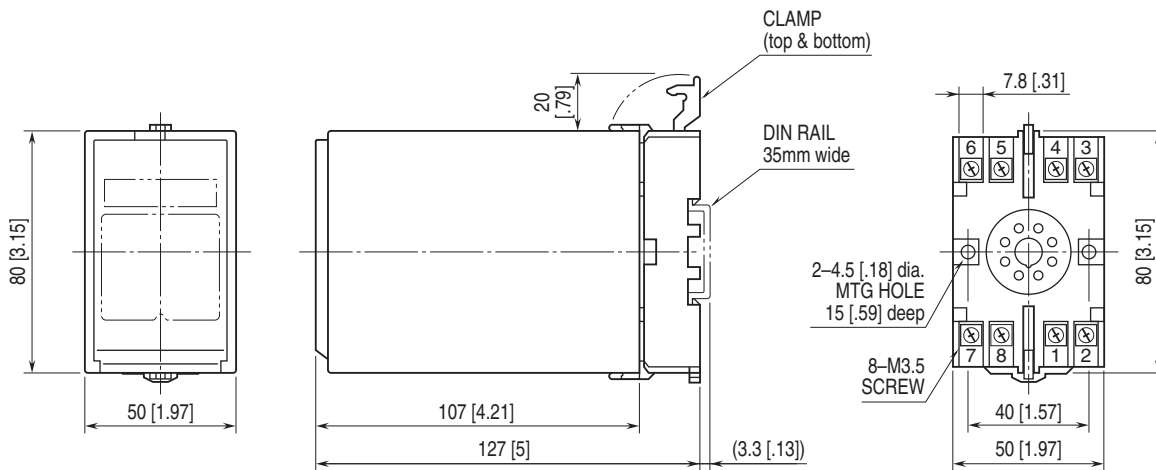

• When mounting, no extra space is needed between units.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

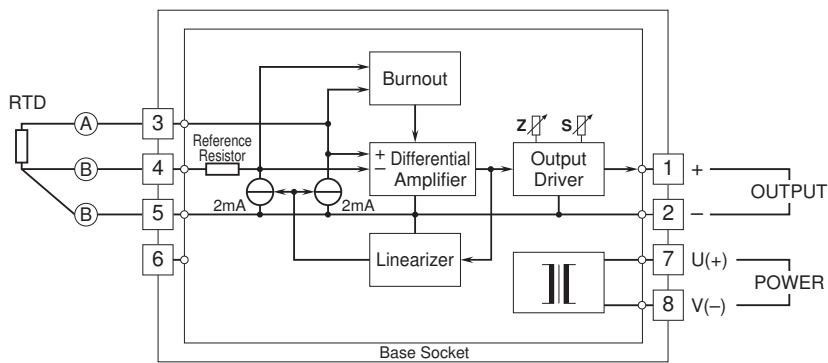

Specifications are subject to change without notice.