

## Dual Output Plug-in Signal Conditioners W-UNIT


### SIGNAL TRANSMITTER

#### Functions & Features

- Converting a DC input into two standard process signals
- Isolation up to 2000 V AC
- Fast response type available
- LCD meter
- High-density mounting

#### Typical Applications

- Isolation between control room and field instrumentation
- Power plant (2000 V AC isolation, 110 V DC power supply)

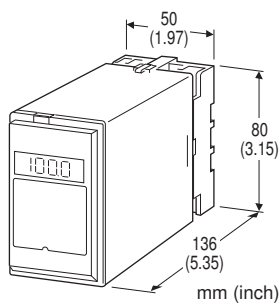

### MODEL: WVS-[1][2][3]-[4][5]

#### ORDERING INFORMATION

- Code number: WVS-[1][2][3]-[4][5]
- Specify a code from below for each of [1] through [5].  
(e.g. WVS-6AA-B/E/K/Q)
- Special input and output ranges (For codes Z & 0)
  - Specify the specification for option code /Q  
(e.g. /C01/S01)

Note: When the user requires a current and a voltage output, specify the current to be the Output 1 which allows a greater load.

#### [1] INPUT

##### Current

- A: 4 - 20 mA DC (Input resistance 250 Ω)
- A1: 4 - 20 mA DC (Input resistance 50 Ω)
- B: 2 - 10 mA DC (Input resistance 500 Ω)
- C: 1 - 5 mA DC (Input resistance 1000 Ω)
- D: 0 - 20 mA DC (Input resistance 50 Ω)
- E: 0 - 16 mA DC (Input resistance 62.5 Ω)
- F: 0 - 10 mA DC (Input resistance 100 Ω)
- G: 0 - 1 mA DC (Input resistance 1000 Ω)
- H: 10 - 50 mA DC (Input resistance 100 Ω)
- J: 0 - 10 μA DC (Input resistance 1000 Ω)
- K: 0 - 100 μA DC (Input resistance 1000 Ω)

- GW: -1 - +1 mA DC (Input resistance 1000 Ω)
  - FW: -10 - +10 mA DC (Input resistance 100 Ω)
  - Z: Specify current (See INPUT SPECIFICATIONS)
- ##### Voltage
- 1: 0 - 10 mV DC (Input resistance 10 kΩ min.)
  - 15: 0 - 50 mV DC (Input resistance 10 kΩ min.)
  - 16: 0 - 60 mV DC (Input resistance 10 kΩ min.)
  - 2: 0 - 100 mV DC (Input resistance 100 kΩ min.)
  - 3: 0 - 1 V DC (Input resistance 1 MΩ min.)
  - 4: 0 - 10 V DC (Input resistance 1 MΩ min.)
  - 5: 0 - 5 V DC (Input resistance 1 MΩ min.)
  - 6: 1 - 5 V DC (Input resistance 1 MΩ min.)
  - 4W: -10 - +10 V DC (Input resistance 1 MΩ min.)
  - 5W: -5 - +5 V DC (Input resistance 1 MΩ min.)
  - 0: Specify voltage (See INPUT SPECIFICATIONS)

#### [2] OUTPUT 1

##### Current

- A: 4 - 20 mA DC (Load resistance 600 Ω max.)
  - B: 2 - 10 mA DC (Load resistance 1200 Ω max.)
  - C: 1 - 5 mA DC (Load resistance 2400 Ω max.)
  - D: 0 - 20 mA DC (Load resistance 600 Ω max.)
  - E: 0 - 16 mA DC (Load resistance 750 Ω max.)
  - F: 0 - 10 mA DC (Load resistance 1200 Ω max.)
  - G: 0 - 1 mA DC (Load resistance 12 kΩ max.)
  - Z: Specify current (See OUTPUT SPECIFICATIONS)
- ##### Voltage
- 1: 0 - 10 mV DC (Load resistance 10 kΩ min.)
  - 2: 0 - 100 mV DC (Load resistance 100 kΩ min.)
  - 3: 0 - 1 V DC (Load resistance 1000 Ω min.)
  - 4: 0 - 10 V DC (Load resistance 10 kΩ min.)
  - 5: 0 - 5 V DC (Load resistance 5000 Ω min.)
  - 6: 1 - 5 V DC (Load resistance 5000 Ω min.)
  - 4W: -10 - +10 V DC (Load resistance 10 kΩ min.)
  - 5W: -5 - +5 V DC (Load resistance 5000 Ω min.)
  - 0: Specify voltage (See OUTPUT SPECIFICATIONS)

#### [3] OUTPUT 2

##### Current

- A: 4 - 20 mA DC (Load resistance 350 Ω max.)
  - B: 2 - 10 mA DC (Load resistance 700 Ω max.)
  - C: 1 - 5 mA DC (Load resistance 1400 Ω max.)
  - D: 0 - 20 mA DC (Load resistance 350 Ω max.)
  - E: 0 - 16 mA DC (Load resistance 430 Ω max.)
  - F: 0 - 10 mA DC (Load resistance 700 Ω max.)
  - G: 0 - 1 mA DC (Load resistance 7000 Ω max.)
  - Z: Specify current (See OUTPUT SPECIFICATIONS)
- ##### Voltage
- Same range availability as Output 1

**[4] POWER INPUT**

AC Power  
**B:** 100 V AC  
**C:** 110 V AC  
**D:** 115 V AC  
**F:** 120 V AC  
**G:** 200 V AC  
**H:** 220 V AC  
**J:** 240 V AC  
 DC Power  
**S:** 12 V DC  
**R:** 24 V DC  
**V:** 48 V DC  
**P:** 110 V DC

**[5] OPTIONS (multiple selections)**

Input Signal Indicator  
**blank:** Without  
**/E:** With (0.0 - 100.0 % display)  
 Response Time (0 - 90 %)  
**blank:** Standard ( $\leq 0.5$  sec.)  
**/K:** Fast Response (Approx. 25 msec.)  
 Other Options  
**blank:** none  
**/Q:** Option other than the above (specify the specification)

**SPECIFICATIONS OF OPTION: Q (multiple selections)**

COATING (For the detail, refer to our web site.)  
**/C01:** Silicone coating  
**/C02:** Polyurethane coating  
**/C03:** Rubber coating  
 TERMINAL SCREW MATERIAL  
**/S01:** Stainless steel

**GENERAL SPECIFICATIONS**

**Construction:** Plug-in  
**Connection:** M3.5 screw terminals  
**Screw terminal:** Chromated steel (standard) or stainless steel  
**Housing material:** Flame-resistant resin (black)  
**Isolation:** Input to output 1 to output 2 to power  
**Overrange output:** Approx. -10 to +120 % at 1 - 5 V  
**Zero adjustment:** -5 to +5 % (front)  
**Span adjustment:** 95 to 105 % (front)  
 Adjustable individually for each output 1 and output 2.  
**■ DISPLAY (Input indicator)**  
**LCD digital display:** 0.0 - 100.0 % (min. digit 0.1 %)  
 (No scaling)

**INPUT SPECIFICATIONS**

**■ DC Current:**  
 Shunt resistor attached to the input terminals (0.5 W)  
 Specify input resistance value for code Z.  
**■ DC Voltage:** -300 - +300 V DC  
**Minimum span:** 3 mV  
**Offset:** Max. 1.5 times span  
**Input resistance**  
 Span 3 - 10 mV :  $\geq 10$  k $\Omega$   
 Span 10 - 100 mV :  $\geq 10$  k $\Omega$   
 Span 0.1 - 1 V :  $\geq 100$  k $\Omega$   
 Span  $\geq 1$  V :  $\geq 1$  M $\Omega$

**OUTPUT SPECIFICATIONS**

**■ DC Current:** 0 - 20 mA DC  
**Minimum span:** 1 mA  
**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 12 V max. for Output 1;  
 7 V max. for Output 2  
**■ DC Voltage:** -10 - +12 V DC  
**Minimum span:** 5 mV  
**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 1 mA max. at  $\geq 0.5$  V


**INSTALLATION**

**Power input**  
**•AC:** Operational voltage range: rating  $\pm 10$  %, 50/60  $\pm 2$  Hz, approx. 3 VA  
**•DC:** Operational voltage range: rating  $\pm 10$  %, or 85 - 150 V for 110 V rating, ripple 10 %p-p max., approx. 3 W (125 mA at 24 V)  
**Operating temperature:** -5 to +55°C (23 to 131°F)  
**Operating humidity:** 30 to 90 %RH (non-condensing)  
**Mounting:** Surface or DIN rail  
**Weight:** 400 g (0.88 lb)

**PERFORMANCE in percentage of span**


**Accuracy:**  $\pm 0.1$  %  
**Display accuracy:**  $\pm (0.1$  % of FS + 1 digit)  
**Temp. coefficient:**  $\pm 0.015$  %/°C ( $\pm 0.008$  %/°F)  
**Line voltage effect:**  $\pm 0.1$  % over voltage range  
**Insulation resistance:**  $\geq 100$  M $\Omega$  with 500 V DC  
**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)  
 1000 V AC @ 1 minute (output 1 to output 2)

## EXTERNAL DIMENSIONS unit: mm [inch]

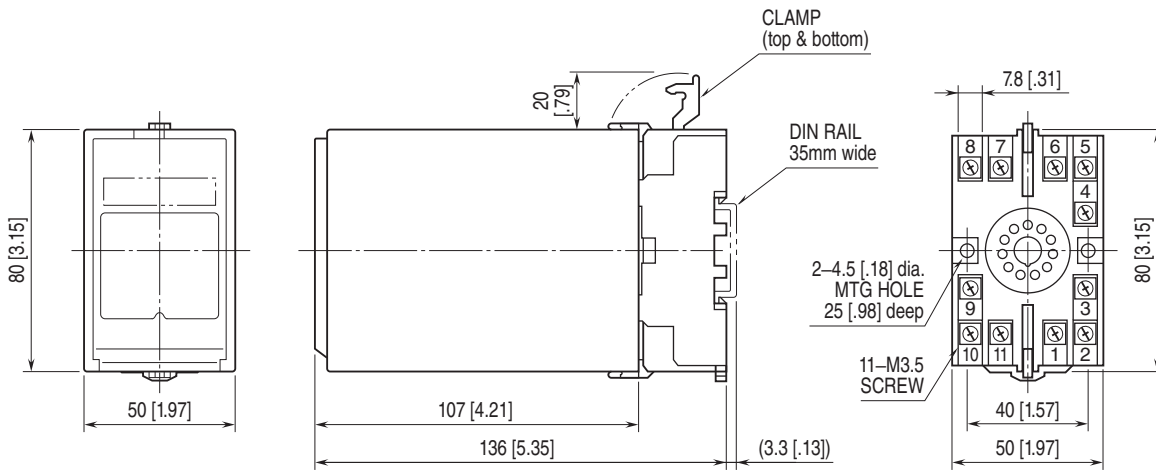


• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm [inch]

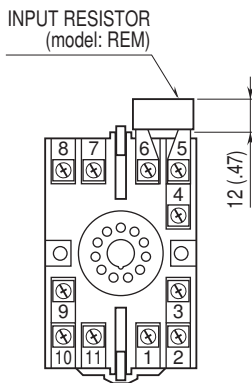

Input shunt resistor attached for current input.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

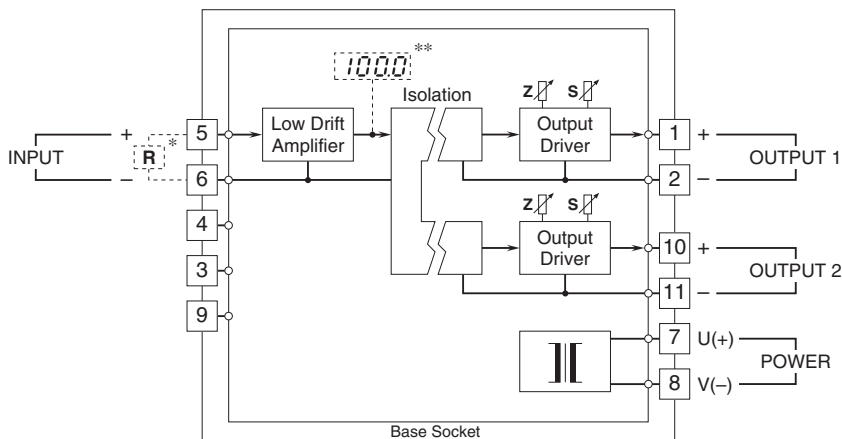

\* Input shunt resistor attached for current input.  
 \*\* Option /E



Specifications are subject to change without notice.