

## Dual Output Plug-in Signal Conditioners W-UNIT

6: 1 - 5 V DC (Load resistance 5000 Ω min.)


### ISOLATOR

#### Functions & Features

- Standard instrumentation signal isolator
- LCD meter
- High-density mounting

#### Typical Applications

- Isolation between control room and field instrumentation

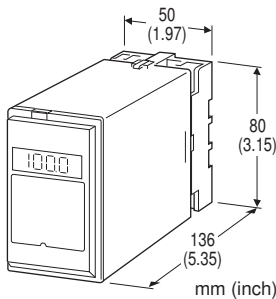

### MODEL: WYV-[1][2][3]-B[4]

#### ORDERING INFORMATION

- Code number: WYV-[1][2][3]-B[4]

Specify a code from below for each of [1] through [4].

(e.g. WYV-6A6-B/E/Q)

- Specify the specification for option code /Q  
(e.g. /C01/S01)

Note: When the user requires a current and a voltage output, specify the current to be the Output 1 which allows a greater load.

#### [1] INPUT

Current

A: 4 - 20 mA DC (Input resistance 250 Ω)

Voltage

6: 1 - 5 V DC (Input resistance 1 MΩ min.)

#### [2] OUTPUT 1

Current

A: 4 - 20 mA DC (Load resistance 600 Ω max.)

Voltage

6: 1 - 5 V DC (Load resistance 5000 Ω min.)

#### [3] OUTPUT 2

Current

A: 4 - 20 mA DC (Load resistance 350 Ω max.)

Voltage

### POWER INPUT

AC Power

B: 100 V AC

### [4] OPTIONS (multiple selections)

Input Signal Indicator

blank: Without

/E: With (0.0 - 100.0 % display)

Other Options

blank: none

/Q: Option other than the above (specify the specification)

### SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

TERMINAL SCREW MATERIAL

/S01: Stainless steel

### GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3.5 screw terminals

Screw terminal: Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Input to output 1 to output 2 to power

Overrange output: Approx. -10 to +120 % at 1 - 5 V

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

Adjustable individually for each output 1 and output 2.

■ DISPLAY (Input indicator)

LCD digital display: 0.0 - 100.0 % (min. digit 0.1 %)

(No scaling)

### INPUT SPECIFICATIONS

■ DC Current:

Shunt resistor attached to the input terminals (0.5 W)

### INSTALLATION

Power input

•AC: Operational voltage range: rating  $\pm 10$  %, 50/60  $\pm 2$  Hz, approx. 3 VA

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)


Mounting: Surface or DIN rail

Weight: 400 g (0.88 lb)

## PERFORMANCE in percentage of span


- Accuracy:  $\pm 0.1\%$
- Display accuracy:  $\pm(0.1\% \text{ of FS} + 1 \text{ digit})$
- Temp. coefficient:  $\pm 0.015\% / ^\circ\text{C}$  ( $\pm 0.008\% / ^\circ\text{F}$ )
- Response time:  $\leq 0.5 \text{ sec.}$  (0 - 90 %)
- Line voltage effect:  $\pm 0.1\%$  over voltage range
- Insulation resistance:  $\geq 100 \text{ M}\Omega$  with 500 V DC
- Dielectric strength: 2000 V AC @1 minute  
(input to output to power to ground)  
1000 V AC @ 1 minute (output 1 to output 2)

## EXTERNAL DIMENSIONS unit: mm [inch]

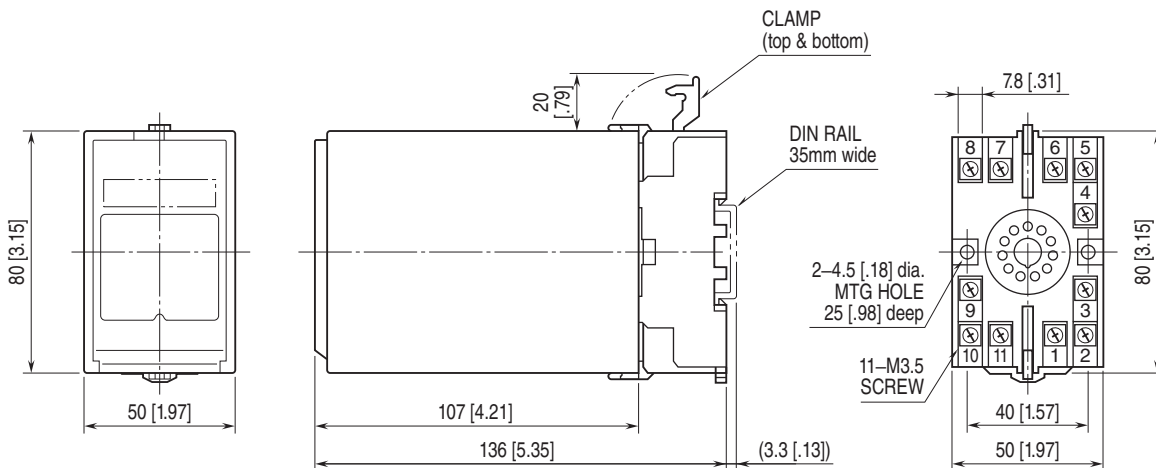


• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm [inch]

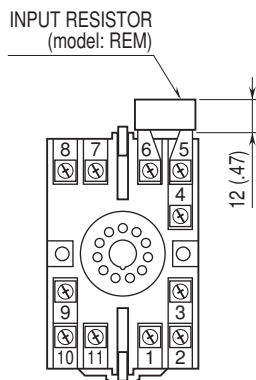

Input shunt resistor attached for current input.

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

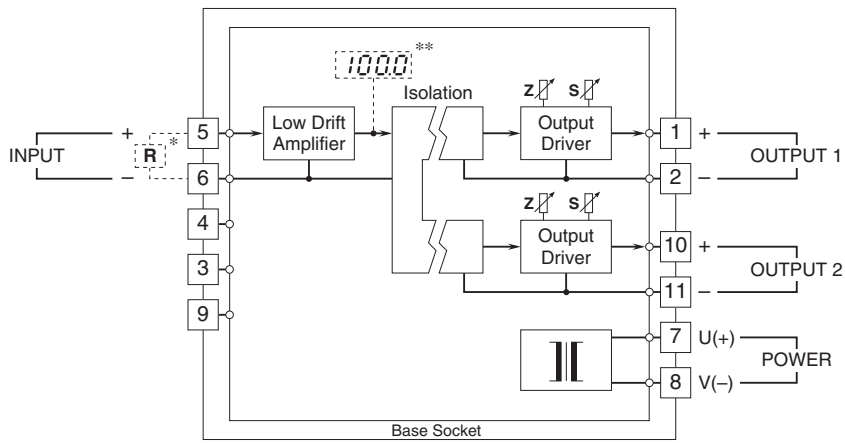

\* Input shunt resistor attached for current input.  
 \*\* Option /E



Specifications are subject to change without notice.