

**Space-saving Dual Output Signal Conditioners  
Mini-MW Series**

**CURRENT LOOP SUPPLY**


(with square root extractor)

**Functions & Features**

- Powers a 4 - 20 mA DC current loop
- Square root extraction
- Shortcircuit protection
- Applicable to smart transmitters

**Typical Applications**

- Various 2-wire transmitters

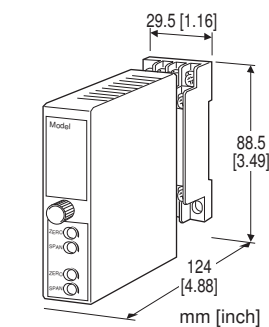

**MODEL: W2DNY-24[1][2]-[3][4]**

**ORDERING INFORMATION**

- Code number: W2DNY-24[1][2]-[3][4]
- Specify a code from below for each of [1] through [4].  
(e.g. W2DNY-24A6-M2/CE/Q)
- Special output ranges (For codes Z & 0)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

Note: When the user requires a current and a voltage output, specify the current to be the Output 1 which allows a greater load.

**SUPPLY OUTPUT**

**24:** 24 V DC

**INPUT**

Current  
4 - 20 mA DC

**[1] OUTPUT 1**

- Current
- A:** 4 - 20 mA DC (Load resistance 750 Ω max.)
  - B:** 2 - 10 mA DC (Load resistance 1500 Ω max.)
  - C:** 1 - 5 mA DC (Load resistance 3000 Ω max.)
  - D:** 0 - 20 mA DC (Load resistance 750 Ω max.)
  - E:** 0 - 16 mA DC (Load resistance 900 Ω max.)
  - F:** 0 - 10 mA DC (Load resistance 1500 Ω max.)
  - G:** 0 - 1 mA DC (Load resistance 15 kΩ max.)
  - Z:** Specify current (See OUTPUT SPECIFICATIONS)
- Voltage
- 1:** 0 - 10 mV DC (Load resistance 10 kΩ min.)
  - 2:** 0 - 100 mV DC (Load resistance 100 kΩ min.)
  - 3:** 0 - 1 V DC (Load resistance 1000 Ω min.)
  - 4:** 0 - 10 V DC (Load resistance 10 kΩ min.)
  - 5:** 0 - 5 V DC (Load resistance 5000 Ω min.)
  - 6:** 1 - 5 V DC (Load resistance 5000 Ω min.)
  - 0:** Specify voltage (See OUTPUT SPECIFICATIONS)

**[2] OUTPUT 2**

- Y: None
- Current
- A:** 4 - 20 mA DC (Load resistance 350 Ω max.)
  - B:** 2 - 10 mA DC (Load resistance 700 Ω max.)
  - C:** 1 - 5 mA DC (Load resistance 1400 Ω max.)
  - D:** 0 - 20 mA DC (Load resistance 350 Ω max.)
  - E:** 0 - 16 mA DC (Load resistance 430 Ω max.)
  - F:** 0 - 10 mA DC (Load resistance 700 Ω max.)
  - G:** 0 - 1 mA DC (Load resistance 7000 Ω max.)
  - Z:** Specify current (See OUTPUT SPECIFICATIONS)
- Voltage
- Same range availability as Output 1

**[3] POWER INPUT**

- AC Power
- M:** 85 - 264 V AC (Operational voltage range 85 - 264 V, 47 - 66 Hz)  
(Select '/N' for 'Standards & Approvals' code.)
  - M2:** 100 - 240 V AC (Operational voltage range 85 - 264 V, 47 - 66 Hz)  
(90 - 264 V for UL)
- DC Power
- R:** 24 V DC  
(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)
  - R2:** 11 - 27 V DC  
(Operational voltage range 11 - 27 V, ripple 10 %p-p max.)  
(Select '/N' for 'Standards & Approvals' code.)
  - P:** 110 V DC  
(Operational voltage range 85 - 150 V, ripple 10 %p-p max.)  
(110 V ±10 % for UL)

## [4] OPTIONS (multiple selections)

Standards & Approvals (must be specified)

/N: Without CE or UL

/CE: CE marking

/UL: UL approval, CE marking

Other Options

blank: none

/Q: Option other than the above (specify the specification)

## SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating (UL not available)

TERMINAL SCREW MATERIAL

/S01: Stainless steel (UL not available)

## GENERAL SPECIFICATIONS

**Construction:** Plug-in

**Connection:** M3 screw terminals (torque 0.8 N·m)

**Screw terminal:** Chromated steel (standard) or stainless steel

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to output 1 to output 2 to power


**Overrange output:** 0 to 110 % at 1 - 5 V

**Zero adjustment:** -5 to +5 % (front)

**Span adjustment:** 95 to 105 % (front)

Adjustable individually for each output 1 and output 2.

**Low-end cutout:** Approx. 4 - 8 % (output)

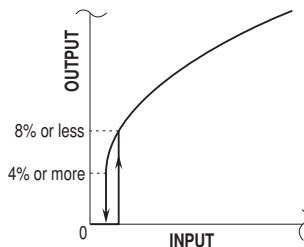

## SUPPLY OUTPUT

(across the terminals 1 - 5)

**Output voltage:** 24 - 28 V DC with no load

18 V DC min. at 20 mA

**Current rating:** ≤ 22 mA DC

• **Shortcircuit Protection**

**Current limited:** 30 mA max.

**Protected time duration:** No limit

## INPUT SPECIFICATIONS

■ **DC Current:** Input resistors incorporated

Approx. 300 Ω (50 Ω as receiving resistor, 250 Ω across the monitor terminals)

## OUTPUT SPECIFICATIONS

■ **DC Current:** 0 - 20 mA DC

**Minimum span:** 1 mA

**Offset:** Max. 1.5 times span

**Load resistance:** Output drive 15 V max. for Output 1; 7 V max. for Output 2

■ **DC Voltage:** 0 - 12 V DC (up to 10 V for Output 2)

**Minimum span:** 10 mV

**Offset:** Max. 1.5 times span

**Load resistance:** Output drive 1 mA max.; at ≥0.5 V

## INSTALLATION

**Power Consumption**

• **AC:**

Approx. 5 VA at 100 V

Approx. 6 VA at 200 V

Approx. 7 VA at 264 V

• **DC:** Approx. 3 W

**Operating temperature:** -5 to +55°C (23 to 131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail

**Weight:** 200 g (0.44 lb)

## PERFORMANCE in percentage of span

**Accuracy:** ±0.2 % (input 1 - 100 %)

**Temp. coefficient:** ±0.015 %/°C (±0.008 %/°F)

**Response time:** ≤ 0.5 sec. (0 - 90 %)

**Line voltage effect**

**Supply output:** ±3 % over voltage range

**Output signal:** ±0.1 % over voltage range

**Insulation resistance:** ≥ 100 MΩ with 500 V DC

**Dielectric strength:** 2000 V AC @1 minute (input to output 1 to output 2 to power to ground)

## STANDARDS & APPROVALS

### EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

Low Voltage Directive

EN 61010-1

Installation Category II

Pollution Degree 2

Input or output 1 or output 2 to power input:

Reinforced insulation (300 V)

Input to output 1 to output 2: Basic insulation (300 V)

RoHS Directive

### Approval:

UL/C-UL nonincendive Class I, Division 2,


Groups A, B, C, and D

(ANSI/ISA-12.12.01, CAN/CSA-C22.2 No.213)

UL/C-UL general safety requirements


(UL 61010-1, CAN/CSA-C22.2 No.61010-1)

## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

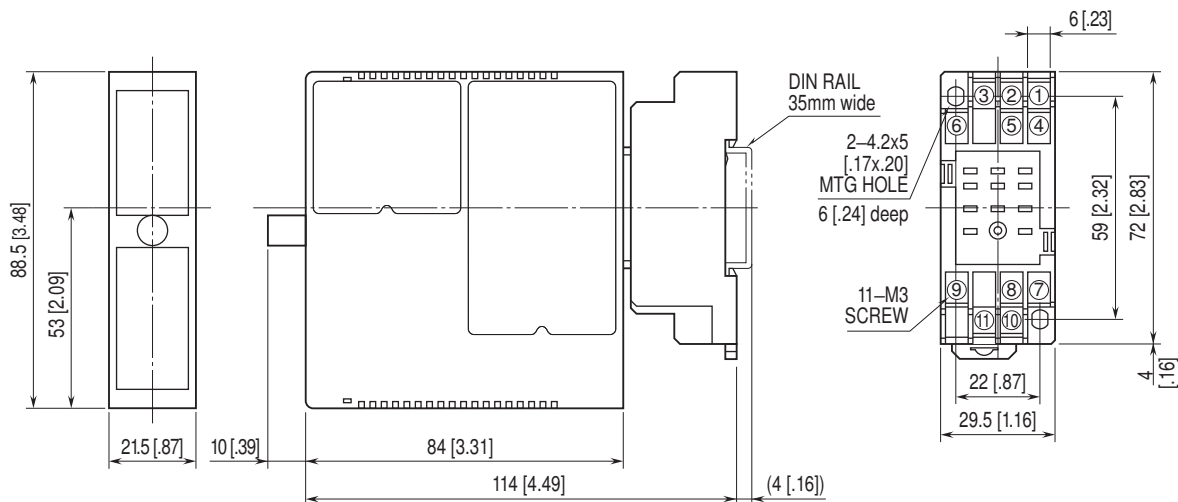


• When mounting, no extra space is needed between units.

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

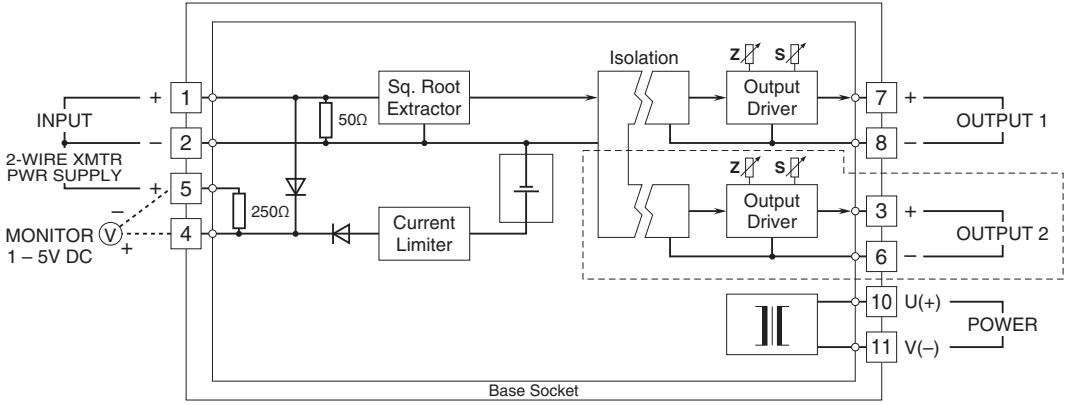


Note: The section enclosed by broken line is only with 2nd output option.

■ When Used as DC Supply

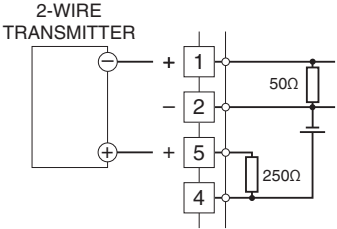

■ When Used as Square Root Extractor

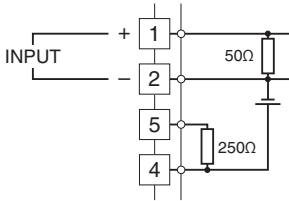

Specifications are subject to change without notice.