

**Space-saving Dual Output Signal Conditioners  
Mini-MW Series**


**P/I TRANSDUCER**

**Functions & Features**

- Converts a standard pneumatic signal into a proportional DC output

**Typical Applications**

- Converting a pneumatic system into a 4 - 20 mA for indicating and controlling in DCS system

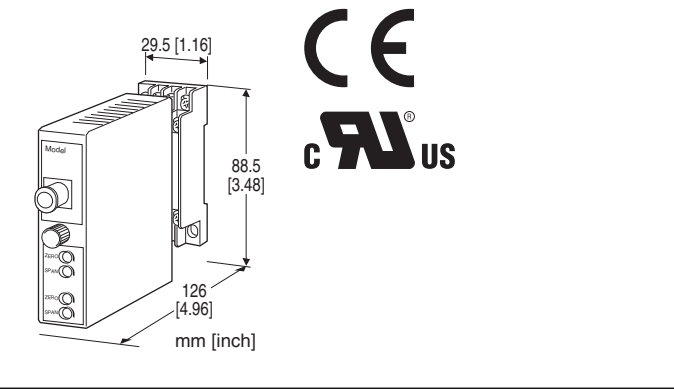

**MODEL: W2PV-C[1][2][3]-[4][5]**

**ORDERING INFORMATION**

- Code number: W2PV-C[1][2][3]-[4][5]
- Specify a code from below for each of [1] through [5].  
(e.g. W2PV-C2SAA-M2/CE/Q)
- Special output range (For codes Z & 0)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

Note: When the user requires a current and a voltage output, specify the current to be the Output 1 which allows a greater load.

**PNEUMATIC CONNECTION**

C: 6 mm dia. (.24")

**[1] INPUT**

- 1S:** 19.6 - 98.1 kPa
- 2S:** 20 - 100 kPa
- 3S:** 20.7 - 103.4 kPa
- 1:** 0.2 - 1.0 kgf/cm<sup>2</sup>
- 2:** 0.2 - 1.0 bar
- 3:** 3 - 15 psig

**[2] OUTPUT 1**

- Current
- A:** 4 - 20 mA DC (Load resistance 750 Ω max.)
  - B:** 2 - 10 mA DC (Load resistance 1500 Ω max.)
  - C:** 1 - 5 mA DC (Load resistance 3000 Ω max.)
  - D:** 0 - 20 mA DC (Load resistance 750 Ω max.)
  - E:** 0 - 16 mA DC (Load resistance 900 Ω max.)
  - F:** 0 - 10 mA DC (Load resistance 1500 Ω max.)
  - G:** 0 - 1 mA DC (Load resistance 15 kΩ max.)
  - Z:** Specify current (See OUTPUT SPECIFICATIONS)
- Voltage
- 1:** 0 - 10 mV DC (Load resistance 10 kΩ min.)
  - 2:** 0 - 100 mV DC (Load resistance 100 kΩ min.)
  - 3:** 0 - 1 V DC (Load resistance 1000 Ω min.)
  - 4:** 0 - 10 V DC (Load resistance 10 kΩ min.)
  - 5:** 0 - 5 V DC (Load resistance 5000 Ω min.)
  - 6:** 1 - 5 V DC (Load resistance 5000 Ω min.)
  - 0:** Specify voltage (See OUTPUT SPECIFICATIONS)

**[3] OUTPUT 2**

- Y: None
- Current
- A:** 4 - 20 mA DC (Load resistance 350 Ω max.)
  - B:** 2 - 10 mA DC (Load resistance 700 Ω max.)
  - C:** 1 - 5 mA DC (Load resistance 1400 Ω max.)
  - D:** 0 - 20 mA DC (Load resistance 350 Ω max.)
  - E:** 0 - 16 mA DC (Load resistance 430 Ω max.)
  - F:** 0 - 10 mA DC (Load resistance 700 Ω max.)
  - G:** 0 - 1 mA DC (Load resistance 7000 Ω max.)
  - Z:** Specify current (See OUTPUT SPECIFICATIONS)
- Voltage
- Same range availability as Output 1

**[4] POWER INPUT**

- AC Power
- M2:** 100 - 240 V AC (Operational voltage range 85 - 264 V, 47 - 66 Hz)  
(90 - 264 V for UL)
- DC Power
- R:** 24 V DC  
(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)
  - R2:** 11 - 27 V DC  
(Operational voltage range 11 - 27 V, ripple 10 %p-p max.)  
(Select '/N' for 'Standards & Approvals' code.)
  - P:** 110 V DC  
(Operational voltage range 85 - 150 V, ripple 10 %p-p max.)  
(110 V ±10 % for UL)

**[5] OPTIONS (multiple selections)**

Standards &amp; Approvals (must be specified)

/N: Without CE or UL

/CE: CE marking

/UL: UL approval, CE marking

Other Options

blank: none

/Q: Option other than the above (specify the specification)

**SPECIFICATIONS OF OPTION: Q (multiple selections)**

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating (UL not available)

TERMINAL SCREW MATERIAL

/S01: Stainless steel (UL not available)

**GENERAL SPECIFICATIONS**

Construction: Plug-in

Connection

Output &amp; power input: M3 screw terminals (torque 0.8 N·m)

Pneumatic: 6 mm dia (.24") tube

Screw terminal: Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Output 1 to output 2 to power

Overrange output: Approx. -10 to +120 % at 1 - 5 V

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

Adjustable individually for each output 1 and output 2.

**INPUT SPECIFICATIONS**

## ■ Input

19.6 - 98.1 kPa, 0.2 - 1.0 kgf/cm<sup>2</sup>

20 - 100 kPa, 0.2 - 1.0 bar

20.7 - 103.4 kPa, 3 - 15 psig

**OUTPUT SPECIFICATIONS**

■ DC Current: 0 - 20 mA DC

Minimum span: 1 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 15 V max. for Output 1;

7 V max. for Output 2

■ DC Voltage: 0 - 12 V DC (up to 10 V for Output 2)

Minimum span: 5 mV

Offset: ≤ 1.5 times span

Load resistance: Output drive 1 mA max.; at ≥0.5 V

**INSTALLATION**

Power Consumption

•AC:

Approx. 4 VA at 100 V

Approx. 5 VA at 200 V

Approx. 6 VA at 240 V

•DC: Approx. 3 W

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 200 g (0.44 lb)

**PERFORMANCE in percentage of span**

Accuracy: ±0.3 %

Temp. coefficient: ±0.03 %/°C (±0.02 %/°F)

Response time: ≤ 0.5 sec. (0 - 90 %)

Permissible overrange: 196 kPa (2.0 kgf/cm<sup>2</sup>, 1.96 bar, 28 psig)

Line voltage effect: ±0.1 % over voltage range

Insulation resistance: ≥ 100 MΩ with 500 V DC

Dielectric strength: 2000 V AC @1 minute (output 1 to output 2 to power to ground)

**STANDARDS & APPROVALS**

EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

Low Voltage Directive

EN 61010-1

Installation Category II

Pollution Degree 2

output 1 or output 2 to power input:

Reinforced insulation (300 V)

output 1 to output 2: Basic insulation (300 V)

RoHS Directive

Approval:

UL/C-UL nonincendive Class I, Division 2,


Groups A, B, C, and D

(ANSI/ISA-12.12.01, CAN/CSA-C22.2 No.213)

UL/C-UL general safety requirements


(UL 61010-1, CAN/CSA-C22.2 No.61010-1)

**EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS** unit: mm [inch]

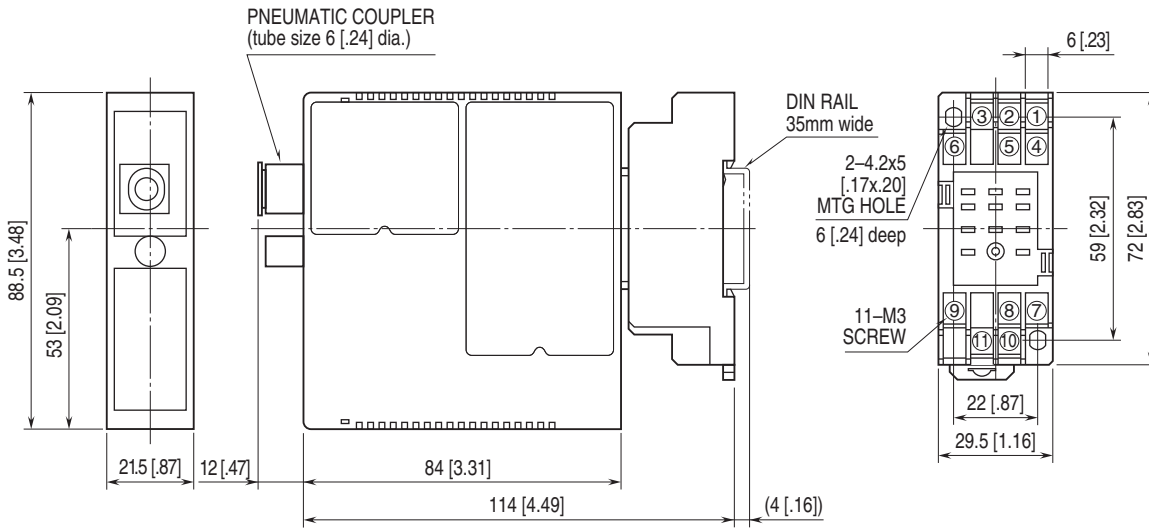

• When mounting, no extra space is needed between units.

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

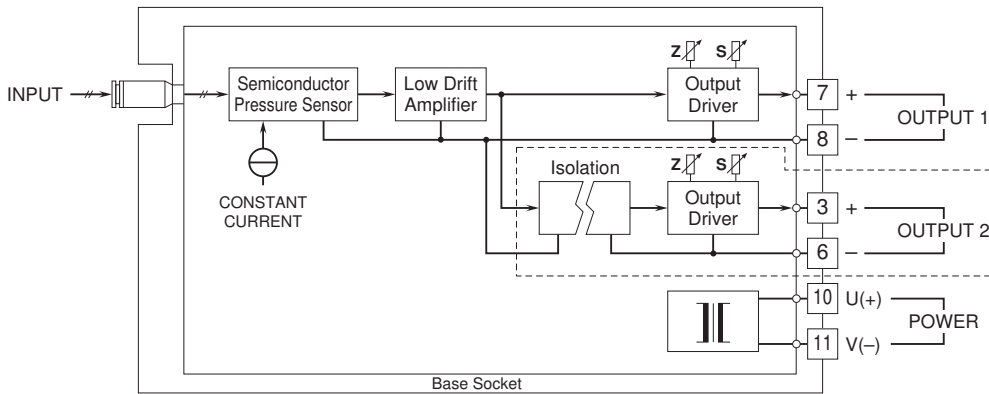

Note: The section enclosed by broken line is only with 2nd output option.



Specifications are subject to change without notice.