

ORDERING INFORMATION Model : M8PP, M8PP1, M8PA, M8PA1

PLEASE FILL IN THIS SECTION



Model
Company
Name
P/O No.

FACTORY USE ONLY



Job No.	Inspected by :
Ser No. -	
Sales	Inspected by :


ITEM	SET VALUE	DEFAULT	COMMENTS
------	-----------	---------	----------

PULSE INPUT SETTING Necessary when input code B or E is selected.

Fill in blank sections or mark with if necessary.

B : DC VOLTAGE PULSE (other than code C or D spec.)

DETECTING LEVEL	V	MUST BE SPECIFIED	Specify within 2 – 10V.
PULSE AMPLITUDE	V p-p	MUST BE SPECIFIED	Specify within 2V p-p – 50V p-p.
OFFSET	V	MUST BE SPECIFIED	

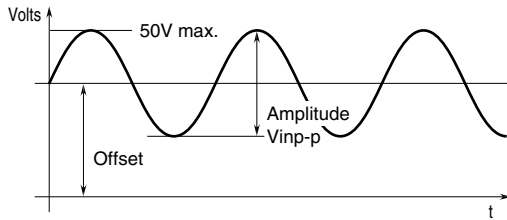

E : AC VOLTAGE PULSE

(Model M8PA, M8PA1 use)

PULSE AMPLITUDE	V p-p	MUST BE SPECIFIED	Specify within 0.1V p-p – 100V p-p.
-----------------	-------	--------------------------	-------------------------------------

(Model M8PP, M8PP1 use)

FREQUENCY	Hz	MUST BE SPECIFIED	Specify within 1 Hz – 50 kHz.
PULSE AMPLITUDE	V p-p	MUST BE SPECIFIED	Specify within 0.1V p-p – 100V p-p.

PULSE OUTPUT SETTING Specify when one-shot output is required.

(Model M8PP, M8PP1 use)

PULSE WIDTH	One shot msec.	50 msec.	Specify within 1 – 500 msec.
-------------	-------------------	----------	------------------------------