

# ORDERING INFORMATION

# MODEL : ABS3

PLEASE FILL IN THIS SECTION



Model
Company
Name
P/O No.

FACTORY USE ONLY



Job No.	Approved by (Sales office)
Ser No.	Issued by (Sales office)
Sales	Approved by (Factory)
	Set by (Factory)

Ser No. \_\_\_\_\_

Specify the items you want to change.

Default setting will be used if not specified.

DEFAULT shows values in case of nothing specified.

## ■ INPUT TYPE (PV)

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
Input Type	PV Input Type A: 4 - 20mA DC 6: 1 - 5V DC	Specify the type among shown left.	<input type="checkbox"/> : 4-20mA DC <input type="checkbox"/> : 1-5V DC	A: 4 - 20mA DC	<input type="checkbox"/> Checked

## ■ OUTPUT TYPE (SV)

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
Output Type	SV Output Type A: 4 - 20mA DC 6: 1 - 5V DC	Specify the type among shown left.	<input type="checkbox"/> : 4 - 20mA DC <input type="checkbox"/> : 1 - 5V DC	A: 4 - 20mA DC	<input type="checkbox"/> Checked


## ■ PV SCALING

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
PV Upper Scaling Value	-1999 - 9999	Specify the range among shown left.		100.0	<input type="checkbox"/> Checked
PV Lower Scaling Value	-1999 - 9999	Specify the range among shown left.		0.0	<input type="checkbox"/> Checked

### ■ PV scaling


#### ● Normal Scaling

The display value increases when the input signal increases.

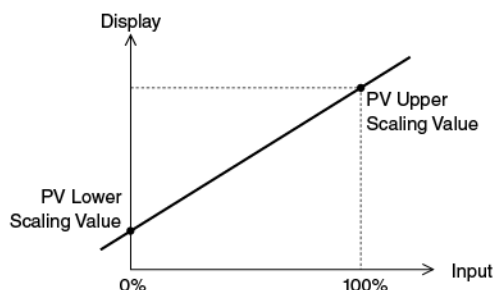

#### ● Inverted Scaling

The display value decreases when the input signal increases.

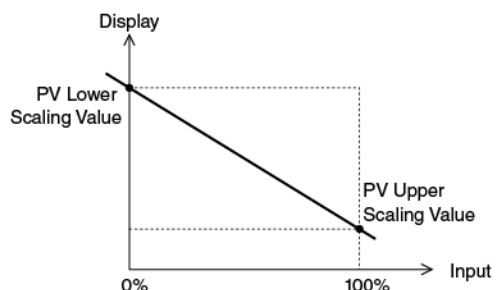

Set the decimal point according to the necessary accuracy.