

ORDERING INFORMATION

MODEL : 47DM

PLEASE FILL IN THIS SECTION



Model
Company
Name
P/O No.

FACTORY USE ONLY



Job No.	Approved by (Sales office)
Ser No.	Issued by (Sales office)
Sales	Approved by (Factory)
	Set by (Factory)
Ser No.	

Specify the items you want to change. Default setting will be used if not specified.

DEFAULT shows values in case of nothing specified.


■ SCALING SETTING

ITEM	AVAILABLE RANGE	SET VALUE	DEFAULT VALUE	Factory Internal check
Scaling Setting Mode → Display Scaling Value Zero → Display Scaling Value Span	Specify the value within the range.	Zero*	Display Scaling Value Zero (-20000 - 100000)	<input type="checkbox"/> Checked
		Span*	Display Scaling Value Span (-20000 - 100000)	


* About scaling point 'Zero' and 'Span.'

Note: Input scaling is set with 'Teach Calibration.'

- Normal Scaling
The display value increases when the input signal increases.

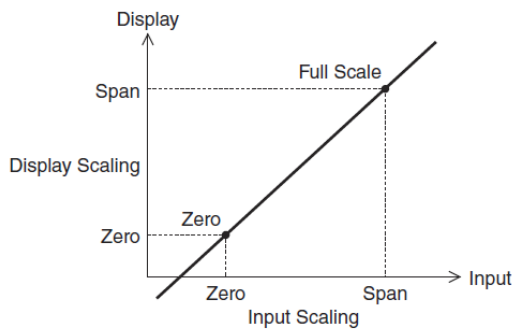

- Inverted Scaling
The display value decreases when the input signal increases.

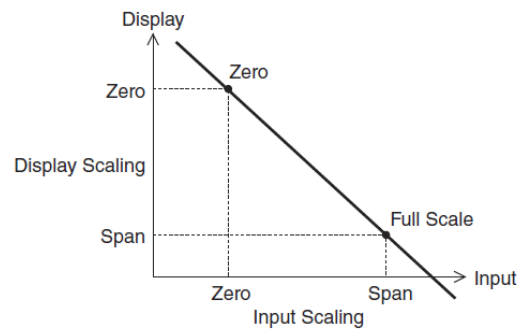

Set the decimal point according to the necessary accuracy.

■ ANALOG OUTPUT SETTING

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
Scaling Setting Mode → Analog Output Type	Output range 0 – 5 V -5 – +5 V -10 – +10 V 0 – 20 mA 4 – 20 mA	Mark <input type="checkbox"/> with <input checked="" type="checkbox"/> if necessary.	<input type="checkbox"/> 0 – 5 V <input type="checkbox"/> -5 – +5 V <input type="checkbox"/> -10 – +10 V <input type="checkbox"/> 0 – 20 mA <input type="checkbox"/> 4 – 20 mA	4 – 20 mA	<input type="checkbox"/> Checked
Scaling Setting Mode → Analog Output 0%	Display value for Analog Output 0% -20000 – 100000	Specify the value within the range.		-100.00	
Scaling Setting Mode → Analog Output 100%	Display value for Analog Output 100% -20000 – 100000	Specify the value within the range.		100.00	

Note 1: When scaling setting is specified and analog output setting is not specified, analog output 0% is set to display scaling value Zero, analog output 100% is set to display scaling value Span.

■ ALARM SETTING

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
Alarm Setting Mode → LL Setpoint*	-20000 – 100000 (Decimal point is disregarded.) '----' for None Alarm	Specify the value within the range.		-80.00	<input type="checkbox"/> Checked
Alarm Setting Mode → L Setpoint	-20000 – 100000 (Decimal point is disregarded.) '----' for None Alarm	Specify the value within the range.		-40.00	
Alarm Setting Mode → H Setpoint	-20000 – 100000 (Decimal point is disregarded.) '----' for None Alarm	Specify the value within the range.		40.00	
Alarm Setting Mode → HH Setpoint*	-20000 – 100000 (Decimal point is disregarded.) '----' for None Alarm	Specify the value within the range.		80.00	

Note: When scaling setting is specified and alarm setting is not specified, L and LL are set to display scaling value Zero, H and HH are set to display scaling value Span.

* Only for 4 points alarm. Not available for 2 points alarm.

■ ENGINEERING UNIT STICKER LABEL

ITEM	AVAILABLE RANGE	SET VALUE	DEFAULT VALUE	Factory Internal check
Engineering unit	DC, AC, mV, V, kV, μ A, mA, A, kA, mW, W, kW, var, kvar, Mvar, VA, Hz, Ω , k Ω , M Ω , cm, mm, m, m/sec, mm/min, cm/min, m/min, m/h, m/s ² , inch, ℓ , ℓ /s, ℓ /min, ℓ /h, m ³ , m ³ /sec, m ³ /min, m ³ /h, Nm ³ /h, N·m, N/m ² , g, kg, kg/h, N, kN, Pa, kPa, MPa, t, t/h, °C, °F, %RH, J, kJ, MJ, rpm, sec, min, min ⁻¹ , pH, %, ppm	Select one if necessary.	none	<input type="checkbox"/> Checked

• Location of the sticker label

