

ORDERING INFORMATION

MODEL : 47LYV

PLEASE FILL IN THIS SECTION



Model
Company
Name
P/O No.

FACTORY USE ONLY



Job No.	Approved by (Sales office)
Ser No.	Issued by (Sales office)
Sales	Approved by (Factory)
	Set by (Factory)
	Ser No.

Specify the items you want to change. Default setting will be used if not specified.


DEFAULT shows values in case of nothing specified.

■ SCALING SETTING


ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
Scaling Setting Mode → Input Scaling Value A → Input Scaling Value B → Display Scaling Value A → Display Scaling Value B	Model: 47LYV-Ax-xx A: 4 – 20mA DC	A*	Input Scaling Value A (4.00 – 20.00)	4.00	<input type="checkbox"/> Checked
			Display Scaling Value A (-19999 – 19999)	4.00	
		B*	Input Scaling Value B (4.00 – 20.00)	20.00	
			Display Scaling Value B (-19999 – 19999)	20.00	
	Model: 47LYV-Dx-xx D: 0 – 20mA DC	A*	Input Scaling Value A (0.00 – 20.00)	0.00	
			Display Scaling Value A (-19999 – 19999)	0.00	
		B*	Input Scaling Value B (0.00 – 20.00)	20.00	
			Display Scaling Value B (-19999 – 19999)	20.00	
	Model: 47LYV-5x-xx 5: 0 – 5V DC	A*	Input Scaling Value A (0.000 – 5.000)	0.000	
			Display Scaling Value A (-19999 – 19999)	0.000	
		B*	Input Scaling Value B (0.000 – 5.000)	5.000	
			Display Scaling Value B (-19999 – 19999)	5.000	
	Model: 47LYV-6x-xx 6: 1 – 5V DC	A*	Input Scaling Value A (1.000 – 5.000)	1.000	
			Display Scaling Value A (-19999 – 19999)	1.000	
B*		Input Scaling Value B (1.000 – 5.000)	5.000		
		Display Scaling Value B (-19999 – 19999)	5.000		
Model: 47LYV-4Wx-xx 4W: -10 – +10V DC	A*	Input Scaling Value A (-10.000 – 10.000)	-10.000		
		Display Scaling Value A (-19999 – 19999)	-10.000		
	B*	Input Scaling Value B (-10.000 – 10.000)	10.000		
		Display Scaling Value B (-19999 – 19999)	10.000		
Model: 47LYV-5Wx-xx 5W: -5 – +5V DC	A*	Input Scaling Value A (-5.000 – 5.000)	-5.000		
		Display Scaling Value A (-19999 – 19999)	-5.000		
	B*	Input Scaling Value B (-5.000 – 5.000)	5.000		
		Display Scaling Value B (-19999 – 19999)	5.000		

* About scaling point 'A' and 'B.'

- Normal Scaling
The display value increases when the input signal increases.

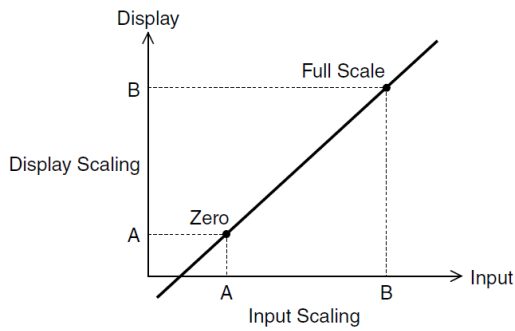

- Inverted Scaling
The display value decreases when the input signal increases.

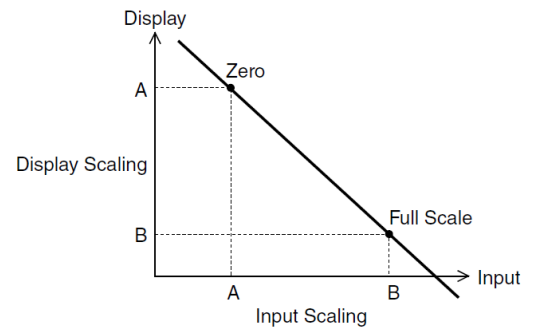

Set the decimal point according to the necessary accuracy.

■ ENGINEERING UNIT STICKER LABEL

ITEM	AVAILABLE RANGE	SET VALUE	DEFAULT VALUE	Factory Internal check
Engineering unit	DC, AC, mV, V, kV, μ A, mA, A, kA, mW, W, kW, var, kvar, Mvar, VA, Hz, Ω , k Ω , M Ω , cm, mm, m, m/sec, mm/min, cm/min, m/min, m/h, m/s ² , inch, ℓ , ℓ /s, ℓ /min, ℓ /h, m ³ , m ³ /sec, m ³ /min, m ³ /h, Nm ³ /h, N·m, N/m ² , g, kg, kg/h, N, kN, Pa, kPa, MPa, t, t/h, °C, °F, %RH, J, kJ, MJ, rpm, sec, min, min ⁻¹ , pH, %, ppm	Select one if necessary.	none	<input type="checkbox"/> Checked

*Location of the sticker label

