

# ORDERING INFORMATION

MODEL : 47NLR

**PLEASE FILL IN THIS SECTION**



Model
Company
Name
P/O No.

**FACTORY USE ONLY**



Job No.	Approved by (Sales office)
Ser No.	Issued by (Sales office)
Sales	Approved by (Factory)
	Set by (Factory)
	Ser No.

**Specify the items you want to change. Default setting will be used if not specified.**

DEFAULT shows values in case of nothing specified.

**■ INITIAL SETTING**

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
<b>Temperature Unit</b>	Temperature Unit C: °C F: °F	Specify the value among shown left.	<input type="checkbox"/> : C <input type="checkbox"/> : F	C : °C	<input type="checkbox"/> Checked
<b>Decimal Point Position</b>	Decimal Point Position doFF : No display after the decimal point d on : One decimal place	Specify the value among shown left.	<input type="checkbox"/> : doFF <input type="checkbox"/> : d on	d on : One decimal place	<input type="checkbox"/> Checked

Note 1: 'don' setting is not available for temperature unit of °F.

**■ ALARM POINT SETTING**

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
<b>Alarm Points</b>	<input type="checkbox"/> Dual alarm <input type="checkbox"/> No-alarm	<input type="checkbox"/> Dual alarm	<input type="checkbox"/> Checked

■ **ALARM SETPOINT SETTING** (When alarm setpoint is set to 2 points)

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
<b>L Alarm Setpoint</b>	-9999 – 9999 (When L setpoint is none, specify “-“.)	Specify the value within the range.  * Decimal point position: No display after the decimal point: Unit 1°C or 1°F One decimal place: Unit 0.1°C		30.0 <sup>*1</sup>	<input type="checkbox"/> Checked
<b>H Alarm Setpoint</b>	-9999 – 9999 (When H setpoint is none, specify “-“.)	Specify the value within the range.  * Decimal point position: No display after the decimal point: Unit 1°C or 1°F One decimal place: Unit 0.1°C		70.0 <sup>*1</sup>	<input type="checkbox"/> Checked

\*1. If Decimal Point Position is changed, Alarm Setpoint is automatically set to “-” (none).


■ **BRIGHTNESS SETTING**

ITEM	SET VALUE	DEFAULT VALUE	Factory Internal check
<b>Brightness</b>	<input type="checkbox"/> C1: Brightness level 1 (dark) <input type="checkbox"/> C2: Brightness level 2 <input type="checkbox"/> C3: Brightness level 3 (medium) <input type="checkbox"/> C4: Brightness level 4 <input type="checkbox"/> C5: Brightness level 5 (bright)	C3: Brightness level 3 (medium)	<input type="checkbox"/> Checked

■ **ENGINEERING UNIT INDICATION**

ITEM	AVAILABLE RANGE		SET VALUE	DEFAULT VALUE	Factory Internal check
<b>Unit Sticker Label</b>	DC, AC, mV, V, kV, μA, mA, A, kA, mW, W, kW, var, kvar, Mvar, VA, Hz, Ω, kΩ, MΩ, cm, mm, m, m/sec, mm/min, cm/min, m/min, m/h, m/s <sup>2</sup> , inch, l, l/s, l/min, l/h, m <sup>3</sup> , m <sup>3</sup> /sec, m <sup>3</sup> /min, m <sup>3</sup> /h, Nm <sup>3</sup> /h, N·m, N/m <sup>2</sup> , g, kg, kg/h, N, kN, Pa, kPa, MPa, t, t/h, °C, °F, %RH, J, Kj, MJ, rpm, sec, min, pH, %, ppm	Select one if necessary.		none	<input type="checkbox"/> Checked

• Location of the sticker label

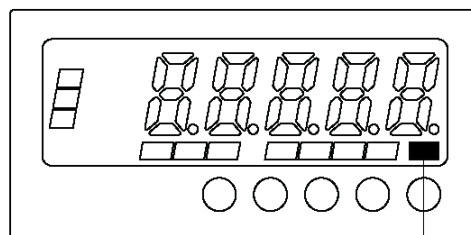

Sticker Label