

INFRARED COMMUNICATION ADAPTOR MODEL: COP-IRU

DRIVER INSTALLATION MANUAL

CONTENTS

| | |
|--|----------|
| 1. INTRODUCTION | 3 |
| 1.1 OUTLINE | 3 |
| 1.2 PC REQUIREMENTS..... | 3 |
| 2. SETUP | 4 |
| 2.1 INSTALLATION..... | 4 |
| 2.2 UNINSTALLATION..... | 5 |
| 2.3 HOW TO MAKE YOUR PC RECOGNIZE COP-IRU VIA USB PORT | 5 |
| 2.3.1 FOR Windows 7 / Windows Vista..... | 5 |
| 2.3.2 FOR Windows XP | 5 |
| 2.4 HOW TO CHANGE COM PORT NUMBER..... | 7 |
| 2.4.1 FOR Windows 7 / Windows Vista..... | 7 |
| 2.4.2 FOR Windows XP | 8 |

1. INTRODUCTION

1.1 OUTLINE

The COP-IRU (hereafter called also as “device”) is an USB device that connects our products with a PC via infrared communication.

Please refer to the following steps for a proper use of COP-IRU

- Installation of the device driver in your PC
- Device connection to the USB port of your PC

1.2 PC REQUIREMENTS

The information and procedures provided in this guide are only operative with the following systems.

| PC | Compatible with IBM PC |
|----|---|
| OS | Windows XP Service Pack 3 Windows Vista (32 bit) Service Pack 1 Windows 7 (32 bit / 64 bit) Note: The software may not function in certain conditions. |

2. SETUP

2.1 INSTALLATION


For using this device it is necessary to install the driver software in your PC. You can find it in the attached CD or our web site.

When the driver software is compressed, decompress it and execute “setup.exe.” Then follow the instruction in order to complete the installation.

Note: Make sure device is not connected to USB port of your PC during the installation.

Windows Administrator account rights are required in order to install the driver software. When the following dialog appears, click on [Allow] to continue with the installation.


■ For Windows 7

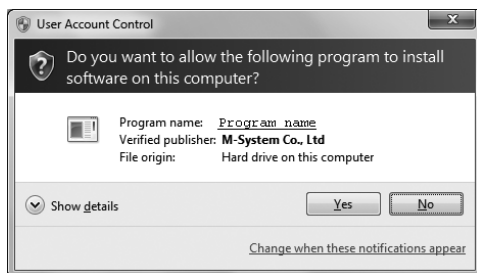

Click on [Yes]

(Program name: COP-IRU)

■ For Windows Vista

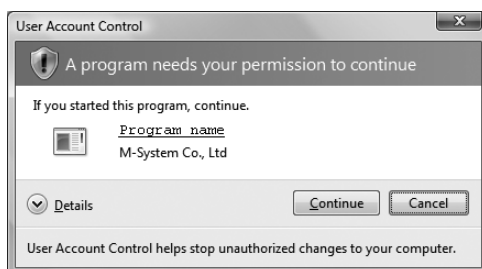


Click on [Continue]

During the installation, dialogs as the following will be displayed. This is the Microsoft software verification dialog. We have verified the software, so click on “Install this driver software anyway.”

(Program name: COP-IRU)

■ For Windows Vista or Windows 7

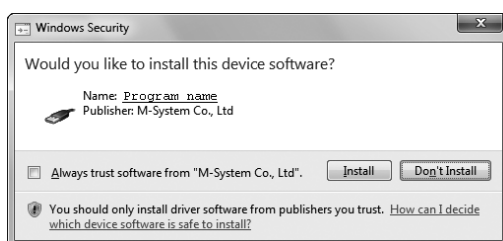

Click on [Install this driver software anyway].

(Program name: COP-IRU)

■ For Windows XP



Click on [Continue Anyway].

2.2 UNINSTALLATION

If you finished using COP-IRU and you want to delete the driver from your computer, uninstall it. For uninstalling, do it from the “Add/Remove Programs” on your Windows “Control Panel.” (For Windows XP, from the “Add or Remove Programs”). Select COP-IRU DriverX.X. (X.X is the version number) and click “Remove.”


2.3 HOW TO MAKE YOUR PC RECOGNIZE COP-IRU VIA USB PORT

Windows recognizes the device connecting it to the USB port of your computer after installing the driver software and installs it automatically.

Note: We recommend connecting always the device in the same USB port. Once the PC has recognized the device allocation on a selected port, an error might occur if it is connected it to a different USB port.


2.3.1 FOR Windows 7 / Windows Vista

For Windows 7 or Windows Vista, connecting the device to the USB port, balloon tips as follows are displayed in the bottom right of the screen, then it becomes able to be used automatically.



2.3.2 FOR Windows XP

Windows XP displays the “Found New Hardware Wizard” automatically. Follow the steps below to make the device operative.

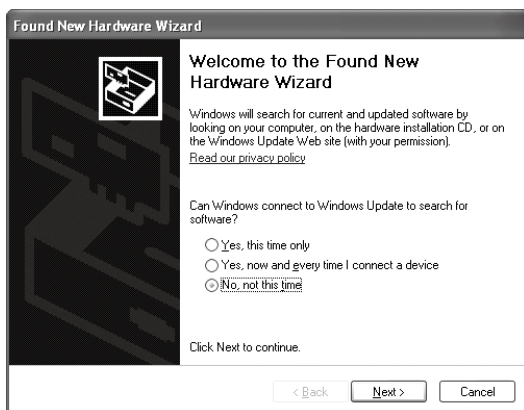


1. Click on [No, not this time].

2. Click on [Next].



3. Click on [Install the software automatically (Recommended)].

4. Click on [Next].

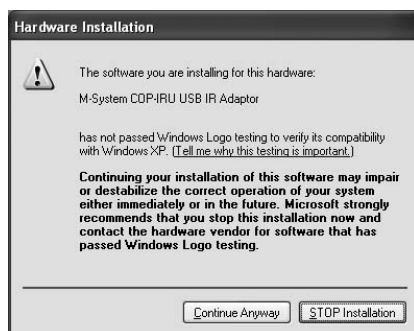

5. Click on [Continue Anyway].




6. Click on [Finish].

After step 6 is completed, repeat the procedure from step 1 once again.


2.4 HOW TO CHANGE COM PORT NUMBER

The device is allocated automatically in the COM port that is available. Referring to this, configuration is changeable.

2.4.1 FOR Windows 7 / Windows Vista

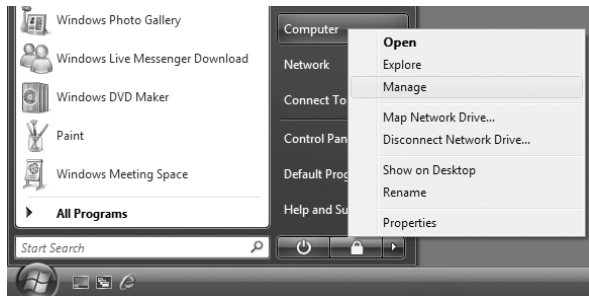


1. Click on [Start].
2. Right-click on [Computer].
3. Click on [Manage].

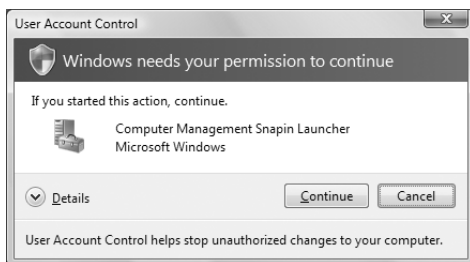


4. Click on [Continue].


This screen is not displayed depending on the OS setting. In that case, skip this step.

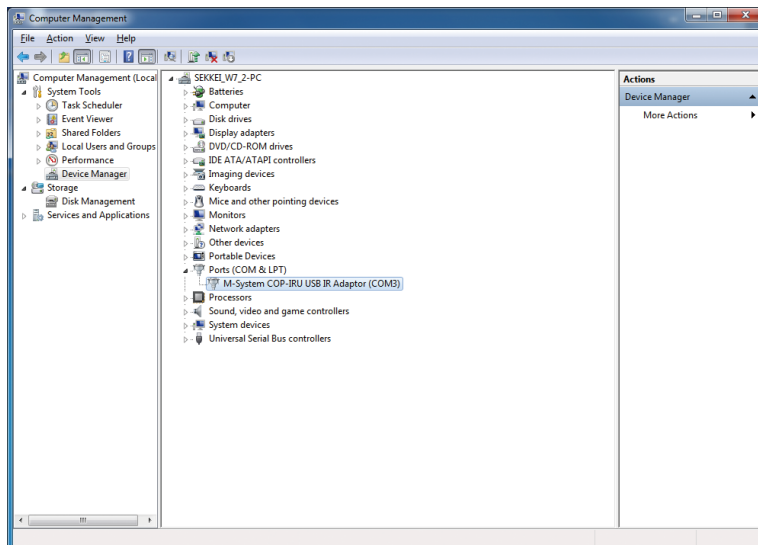

5. Click on [Device Manager].
6. Click on [Ports (COM & LPT)].
7. Double click on [M-System COP-IRU (COMx)].

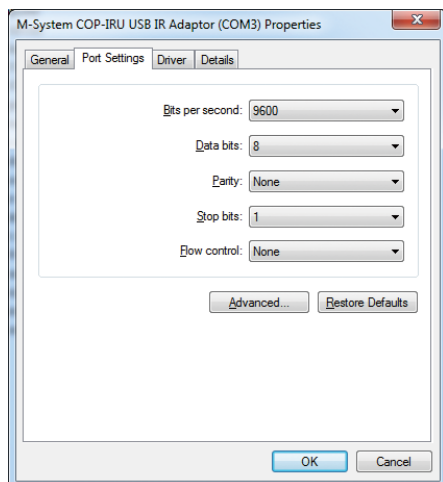


8. Click on [Port Settings].
9. Click on [Advanced].

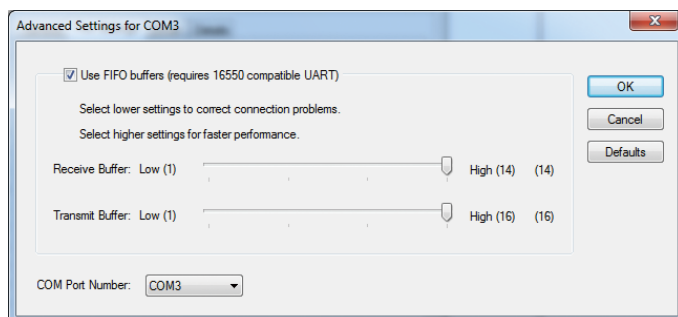


10. In [COM Port number] you can change the COM port allocation number.
11. Clicking on [OK] the changes will be operative.


2.4.2 FOR Windows XP

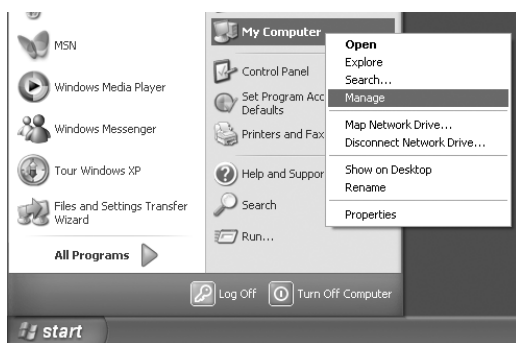


1. Click on [Start].
2. Right-click on [My Computer].
3. Click on [Manage].

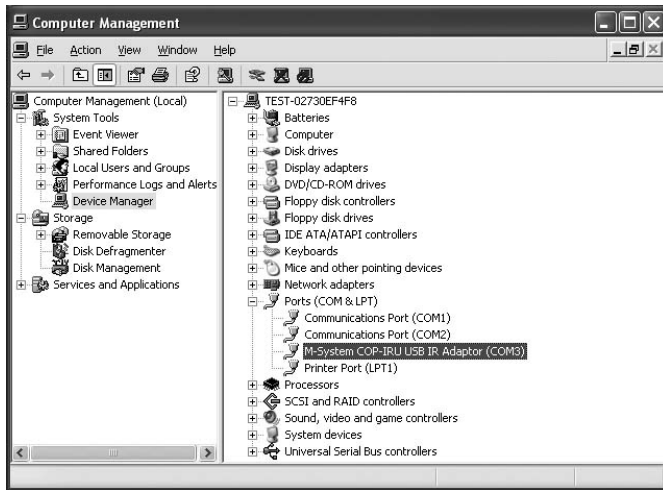

4. Click on [Device Manager].
5. Click on [Ports (COM & LPT)].
6. Double click on [M-System COP-IRU (COMx)].

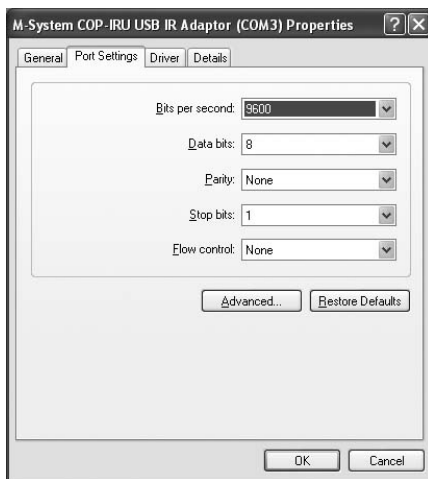

7. Click on [Port Settings].
8. Click on [Advanced].

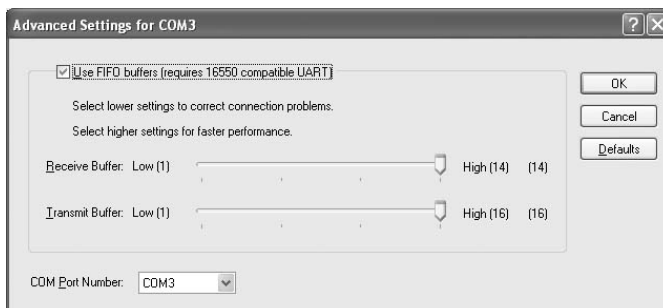

9. In [COM Port number] you can change the COM port allocation number.
10. Clicking on [OK] the changes will be operative