

**Lightning Surge Protectors for  
Electronics Equipment M-RESTER**

**WIRING BRIDGE**

**Functions & Features**

- Easy cross-wiring of multiple MAKx to the common ground

**MODEL: CNB-[1]**

**ORDERING INFORMATION**

- Code number: CNB-[1]

Specify a code from below for [1].

(e.g. CNB-3)

**[1] NUMBER OF POLES**

2: Two poles

3: Three poles

4: Four poles

**GENERAL SPECIFICATIONS**

**Material**

**Conductor:** Nickel-plated copper

**Insulation:** Polyvinyl chloride, black

**INSTALLATION**

**Weight**

CNB-2: 10 g (0.35 oz)

CNB-3: 15 g (0.53 oz)

CNB-4: 20 g (0.71 oz)


**DIMENSIONS unit: mm (inch)**

■CNB-2

■CNB-3

■CNB-4

■CNB ATTACHED TO THE MAKx

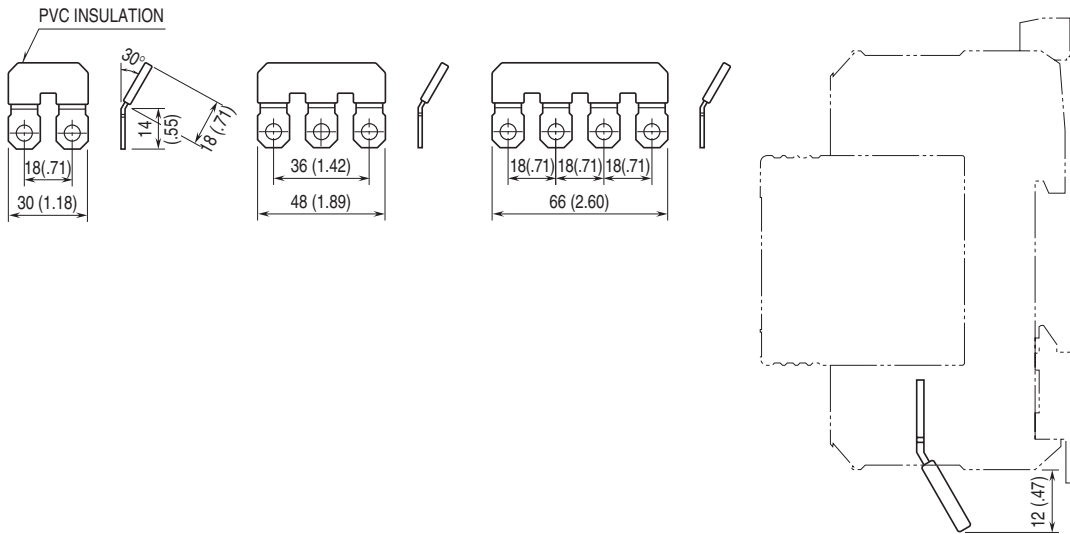

The Wiring Bridge cannot be combined with the Single Mount Adaptor (model: MBS).



Specifications are subject to change without notice.