

## Lightning Surge Protectors for Electronics Equipment M-RESTER

### WIRING BRIDGE

#### Functions & Features

- Easy cross-wiring of multiple MAL/MALN to the common ground

### MODEL: CNB2-[1]

### ORDERING INFORMATION

- Code number: CNB2-[1]

Specify a code from below for [1].

(e.g. CNB2-4)

### [1] NUMBER OF POLES

2: Two poles

4: Four poles (for 2 units)

5: Five poles (for 3 units)

7: Seven poles (for 4 units)

### GENERAL SPECIFICATIONS

#### Material

**Conductor:** Copper

**Insulation:** Resin (white)

### INSTALLATION

#### Weight:

**CNB2-2:** 15 g (0.53 oz)


**CNB2-4:** 17 g (0.60 oz)

**CNB2-5:** 19 g (0.67 oz)


**CNB2-7:** 22 g (0.78 oz)

**EXTERNAL DIMENSIONS** unit: mm [inch]


■CNB2-2

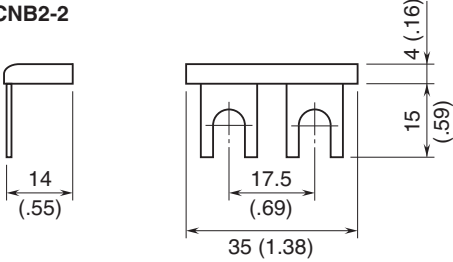


■CNB2 ATTACHED TO M-RESTER

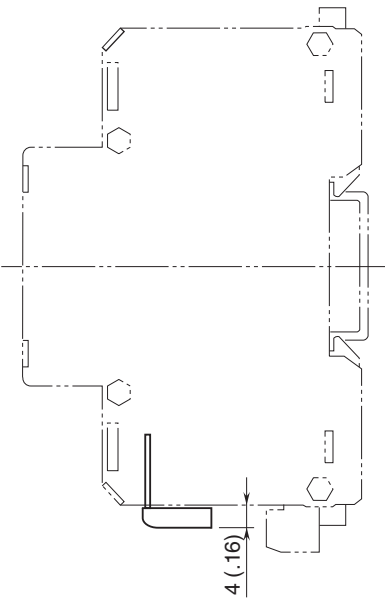


■CNB2-4

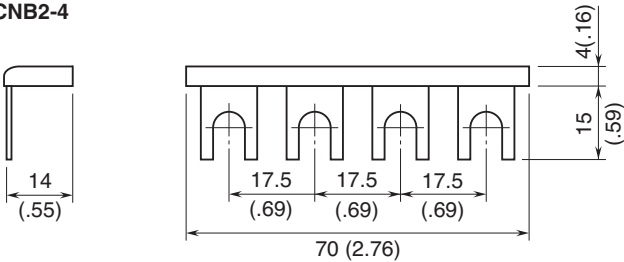


■CNB2-5

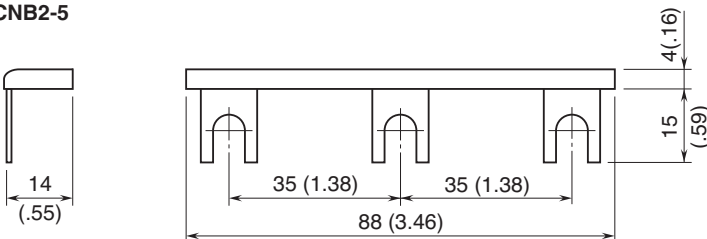

■CNB2-7

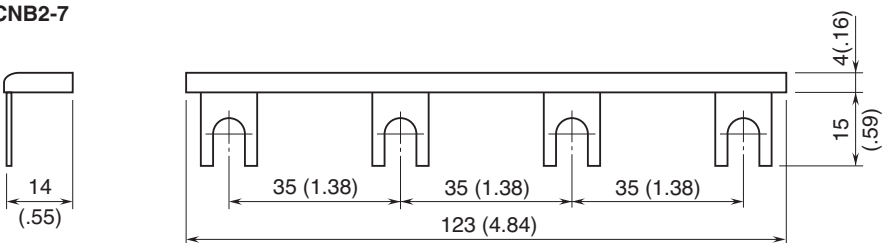

 Specifications are subject to change without notice.