MODEL: M60EVS


Base-free Interconnecting Ultra-Slim Signal Conditioners M60E Series

SIGNAL TRANSMITTER

(field-configurable)

Functions & Features

- Converts DC input from a sensor into a standard process signal
- Output range and response time selectable with DIP SW
- Power connector for interconnecting modules and collectively supplying power
- e-CON connector connection for easy wiring
- 6-mm wide ultra-slim design
- Low profile allows mounting in a 120-mm deep panel
- · High-density mounting
- Power indicator LED



MODEL: M60EVS-R[1]

ORDERING INFORMATION

Code number: M60EVS-R[1]
 Specify a code from below for [1].
 (e.g. M60EVS-R/Q)

• Specify the specification for option code /Q

(e.g. /C01)Default at shipmentInput range: 4 - 20 mA DC

Output range: 4 - 20 mA DC

Response time: Standard response

INPUT - Field-selectable

Current

4 – 20 mA DC (Input resistance 50 Ω)

0 – 20 mA DC (Input resistance 50 $\Omega)$

Voltage

 $0 - 10 \text{ V DC (Input resistance } 200 \text{ k}\Omega \text{ min.)}$

2 – 10 V DC (Input resistance 200 $k\Omega$ min.)

 $0 - 5 \text{ V DC (Input resistance } 100 \text{ k}\Omega \text{ min.)}$

1 – 5 V DC (Input resistance 100 k Ω min.)

OUTPUT - Field-selectable

Current

4 – 20 mA DC (Load resistance 550 Ω max.)

0 - 20 mA DC (Load resistance 550 Ω max.)

Voltage

 $0 - 10 \text{ V DC (Load resistance } 10 \text{ k}\Omega \text{ min.)}$

2 - 10 V DC (Load resistance 10 kΩ min.)

 $0 - 5 \text{ V DC (Load resistance } 5000 \Omega \text{ min.)}$

1 – 5 V DC (Load resistance 5000 Ω min.)

POWER INPUT

DC Power

R: 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

[1] OPTIONS

blank: none

/Q: Options other than the above (specify the specification)

SPECIFICATIONS OF OPTION: Q

COATING (For the detail, refer to our web site.)

/C01: Silicone coating /C02: Polyurethane coating

GENERAL SPECIFICATIONS

Connection

Input and output: 4-pin e-CON connector

Power input: Via the power connector or the 4-pin e-CON

connector

PWB connector (mounted)

Reccomended cable connector: XN2A-1470 (omron)
Applicable wire size: 0.08mm² (AWG28) to 0.5mm² (AWG20)

Outer sheath diameter: max. 1.5 dia

(The cable connector is not included in the package.

Refer to the specifications of the product.) **Housing material**: Flame-resistant resin (black)

Isolation: Input to output to power **Zero adjustment**: -2 to +2 % (front) **Span adjustment**: 98 to 102 % (front)

Power indicator LED: Green LED turns on when the power is

supplied.

INPUT SPECIFICATIONS

■ DC Current: Input resistor incorporated

INSTALLATION

Power consumption: Max. 0.6 W

Power input: Max. 3 A (Total current consumed by the interconnected signal conditionerse must be 3 A or less.)

MODEL: M60EVS

Operating temperature: -20 to +55°C (-4 to +131°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Atmosphere: No corrosive gas or heavy dust

Mounting: DIN rail **Weight**: 65 g (2.3 oz)

PERFORMANCE in percentage of span

Accuracy: ±0.1 %

I/O setting accuracy: ±0.2 %

Temp. coefficient: ± 0.01 %/°C (± 0.006 %/°F) Response time (0 - 90 %): selectable with DIP SW

Standard: \leq 500 msec.

Fast: ≤ 5 msec.

Line voltage effect: ± 0.1 % over voltage range Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC

Dielectric strength: 1500 V AC @1 minute (input to output

to power to ground)

STANDARDS & APPROVALS

EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2


RoHS Directive


EXTERNAL VIEW

Refer to the instruction manual for the setting procedure.


■ LEFT SIDE VIEW

■ FRONT VIEW (with the front cover removed)

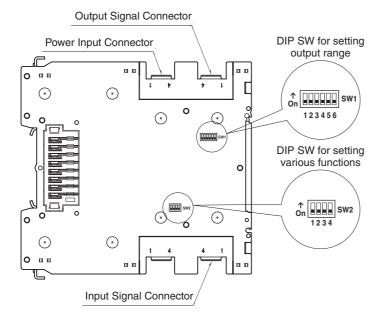




EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

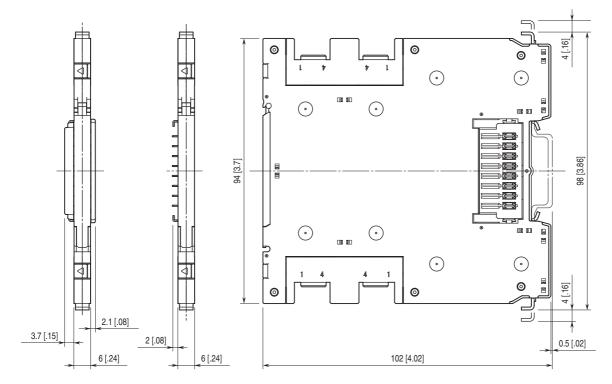

 \cdot With the end cover attached

· Capable of High-density mounting

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

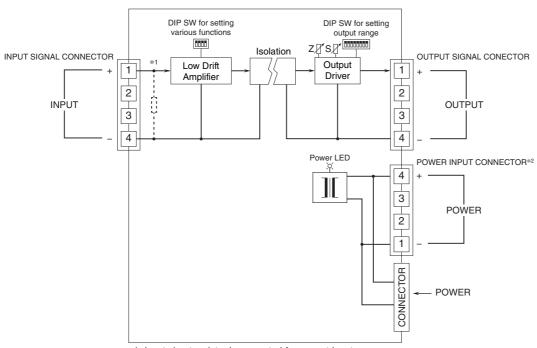

*1. Input shunt resistor incorporated for current input.

*2. Confirm the direction of e-CON.



Specifications are subject to change without notice.